


Panel filters

HANDLING AND MAINTENANCE INSTRUCTION

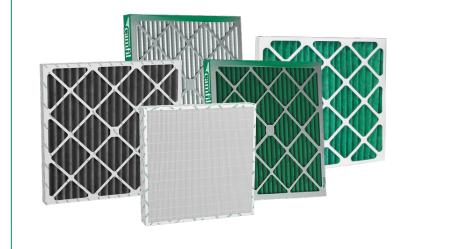

INSTRUCTIONS FOR:

- 30/30
- AeroPleat
- CityPleat
- Dual10
- Dustpanel
- EcoPleat
- M-Pleat

STORAGE INSTRUCTIONS

- Store in a dry and frost-protected place
- Keep stored item in box
- Avoid direct sunlight
- Do not store filter above 70°C
- CityPleat contains carbon media and must be kept in a plastic bag and a box to avoid exposure to humidity and contamination
- Recommended maximum shelf time for CityPleat is 12 months

HANDLING INSTRUCTIONS

- Handle with care
- When unpacking from box: lift the filter carefully by the frame and avoid contact with media
- Keep filter in the box as long as possible before installation to avoid damage

INSTALLATION INSTRUCTIONS

- Be mindful of the airflow direction
- For vertical installations make sure filters are fitted with standing pleats
- Add a gasket if needed to avoid leakage

FILTER CHANGE

- Camfil recommends protective equipment like overalls, gloves and face masks
- Always check local regulations before changing filters

MAINTENANCE INSTRUCTIONS

- Filters for one time installation only
- Do not reuse, wash or clean filters
- Used filters should be disposed of in accordance with local regulations