


✓	NOMINAL SIZE	ACTUAL SIZE		AIRFLOW CAPACITY (CFM)	WEIGHT (LBS)
		H	W		
	20 X 16 X 1	19.38	15.38	1110	5.6
	20 X 20 X 1	19.38	19.38	1390	6.8
	25 X 20 X 1	24.38	19.38	1740	8.2
	25 X 16 X 1	24.38	15.38	1390	6.8
	24 X 24 X 1	23.38	23.38	2000	9.9

✓	NOMINAL SIZE	ACTUAL SIZE		AIRFLOW CAPACITY (CFM)	WEIGHT (LBS)
		H	W		
	20 X 16 X 2	19.38	15.38	1110	7.5
	20 X 20 X 2	19.38	19.38	1390	9.2
	25 X 20 X 2	24.38	19.38	1740	10.8
	25 X 16 X 2	24.38	15.38	1390	9.2
	24 X 24 X 2	23.38	23.38	2000	12.8

✓	NOMINAL SIZE	ACTUAL SIZE		AIRFLOW CAPACITY (CFM)	WEIGHT (LBS)
		H	W		
	20 X 16 X 4	19.38	15.38	1110	14.3
	20 X 20 X 4	19.38	19.38	1390	18.0
	25 X 20 X 4	24.38	19.38	1740	22.7
	25 X 16 X 4	24.38	15.38	1390	18.0
	24 X 24 X 4	23.38	23.38	2000	26.2

CAMFIL FARR FILTER INFORMATION
TOP

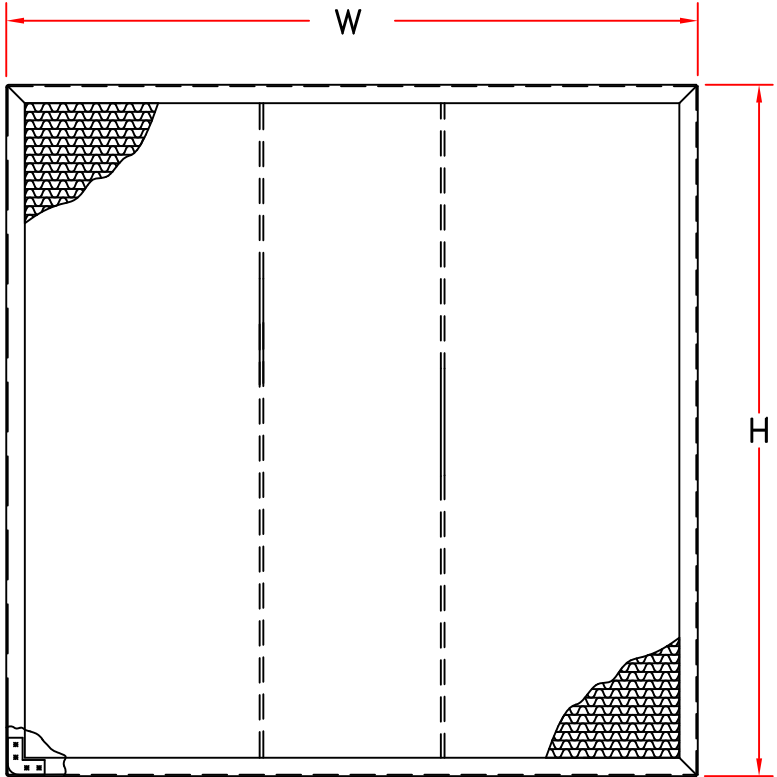

DRAIN HOLES

GENERAL NOTES:

1. MEDIUM EFFICIENCY HIGH VELOCITY PANEL (METAL) HERRINGBONE CRIMPED WASHABLE. FILTER EFFICIENCY IS IN ACCORDANCE WITH CONTRELL PRECIPITATE, LINT TEST AND GRAVIMETRIC TEST.
2. AVAILABLE SIZES (NOMINAL) AND EFFICIENCIES: SEE TABULATION BLOCK.
3. SEE CAMFIL FARR BULLETIN 1002-(LATEST REV.) AND PRODUCT RTF SPECIFICATIONS FOR OTHER FEATURES, CONSTRUCTION AND PERFORMANCE CHARACTERISTICS.
4. FILTER THICKNESS:
1' ACTUAL (TYPE 44, 1')
2' ACTUAL (TYPE 44, 2')
4' ACTUAL (TYPE 44-44, 4')

PERFORMANCE NOTES:

1. SEE TABULATION BLOCK FOR AIRFLOW CAPACITY.
2. CAMFIL FARR RECOMMENDS FILTER TO BE INSTALLED WITH APPROPRIATE FASTENERS.

D	05/16/12	REVISED	14955-BB	SS	SM	SM
A	03/13/02	FIRST ISSUE	14955-P	HDA	CAM	<i>Camfil</i>
REV	DATE	DESCRIPTION	EWO	DFT	CK	APP



© Camfil Farr <http://www.camfilfarr.com>

DESCRIPTION
TYPE 44, A4A4, S4S4 UL 900 FILTER
HERRINGBONE CRIMP
1", 2" & 4" THICK

SHEET	DRAWING NUMBER	REV
1 OF 1	402869	D