CAMGT 3V-600

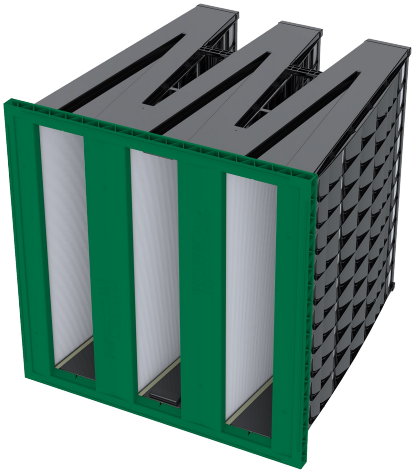



ПРЕИМУЩЕСТВА

- Самый низкий начальный перепад давления для оптимального использования
- Прочная рамка исключает байпас воздуха
- Запатентованная аэродинамическая решетка
- Соответствует самым жестким промышленным требованиям
- Самая большая площадь фильтрующей поверхности для увеличения срока службы фильтра или использования при высокий расходах воздуха
- Высокая эффективность фильтрации (до H13)
- Запатентованная вертикальная плиссировка

Применения	All installations where safety/reliability is crucial in combination with low air resistance, long life and/or high dust concentrations
рамка	Формованный пластик;АБС
прокладка	Polyurethane, endless foamed
средства массовой	Стекловолокно
Разделитель	Hot-melt
Sealant	Polyurethane
Решетка нижняя	Support grid for filtermedia
Rec. final pressure drop	600 Pa
Расход воздуха	1,8 x nominal flow
Максимальная температура, (C)	70°C
Относительной влажности. Макс	100%
Комментарий	Burst strength: > 6250 Pa continuous wet/soaked.

The CamGT 3V-600 is built on a solid 600 mm deep frame with extended media area. The unique design provides industry-leading pressure drop and dust holding capacity ensuring optimum perfomance, low average pressure drop and a long filter life. The filter is also available with CamBrane media in E12 efficiency.

Тип	EN779	Класс фильтра согласно EN1822	Рейтинг PM	Dimensjoner BxHxD (mm)	Поток воздуха/падение давления ($м^3$/ч/Па)	площадь (m^2)	FilterweightMetricItem	ASHRAE 52.2-2017
CamGT 3V 600-T8-Std	F8		ePM1 70%	592x592x600	4250/95	41	15	MERV 14
CAM GT 3V 600-T9-Std	F9		ePM1 85%	592x592x600	4250/115	38	15	MERV 15
CamGT 3V 600-T10-Std		E10		592x592x600	4250/135	45	16	
CamGT 3V 600-T11-Std		E11		592x592x600	4250/140	48	16	
CAM GT 3V 600-T12-Std		E12		592x592x600	4250/190	50	17	
CamGT 3VCB 600-T12-Std		E12		592x592x600	4250/190		19	
CamGT 3V 600-T13-Std		H13		592x592x600	4250/240	50	17	

As part of our program for continuous improvement, Camfil reserves the right to change specifications without notice.
2024-02-19