




NO. OF FILTERS WIDE	1/2	1	1-1/2	2	2-1/2	3	3-1/2	4	4-1/2	5	5-1/2	6	
WIDTH INCHES	11.38	23.38	34.75	46.75	58.13	70.13	81.50	93.50	104.88	116.88	128.25	140.25	
NO. OF FILTERS HIGH	AIRFLOW CAPACITIES (CFM), AT 500 FPM												
HEIGHT INCHES	15.25	-	1,000	-	2,000	-	3,000	-	4,000	-	5,000	-	6,000
1	27.25	1,000	2,000	3,000	4,000	5,000	6,000	7,000	8,000	9,000	10,000	11,000	12,000
1-1/2	39.50	-	3,000	-	6,000	-	9,000	-	12,000	-	15,000	-	18,000
2	51.50	2,000	4,000	6,000	8,000	10,000	12,000	14,000	16,000	18,000	20,000	22,000	24,000
2-1/2	63.75	-	5,000	-	10,000	-	15,000	-	20,000	-	25,000	-	30,000
3	75.75	3,000	6,000	9,000	12,000	15,000	18,000	21,000	24,000	27,000	30,000	33,000	36,000
3-1/2	88.00	-	7,000	-	14,000	-	21,000	-	28,000	-	35,000	-	42,000
4	100.00	4,000	8,000	12,000	16,000	20,000	24,000	28,000	32,000	36,000	40,000	44,000	48,000

OPTION	DESCRIPTION
MT25	STANDARD
MT25D	INSULATED DOORS
MT25I	FULLY INSULATED
MT25H	HIGH PRESSURE (+/- 8" W.G.)
MT25HD	HIGH PRESSURE, INSULATED DOORS
MT25HI	HIGH PRESSURE, FULLY INSULATED

GENERAL NOTES:

- UNIT IS COMPLETELY FACTORY ASSEMBLED. FOR CAPACITY REFER TO TABLE I. FOR APPLICATION REFER TO SALES BULLETIN 24 25 - (LATEST REV.)
- STANDARD MATERIAL OF CONSTRUCTION: 16 GA. GALVANIZED STEEL HOUSING, EXTRUDED ALUMINUM TRACKS WITH FIN SEAL, NEOPRENE DOOR GASKET AND PHENOLIC KNOBS FOR POSITIVE DOOR SEALING. THREE (3) PRESSURE PORTS INSTALLED UPSTREAM OF PREFILTER, BEFORE THE FINAL FILTER AND DOWNSTREAM OF FINAL FILTER.
- HOUSING OPTIONS: (SPECIAL PRICING AND PART NUMBERS REQUIRED)
 - 16 GA. 304/L, 316/L STAINLESS STEEL OR 0.0625 ALUMINUM HOUSING.
 - OTHER SPECIAL OPTIONS REQUIRE CAMFIL FARR SALES AND ENGINEERING CONSULTATION.
- "A" DIMENSION (EXTENSION PAST HOUSING) IS BASED ON THE FINAL FILTER BEING A BAG FILTER. SEE FILTER COMBINATIONS.
- ORDERING INFORMATION: SEE TABLE I AND II SPECIFY OPTIONS AND SIZE
EXAMPLE:

GP MT25 I * 2HX2W
 GlidePack Housing *Material
 Options Blank = Galvanized (standard)
 I = Fully Insulated 304 = 304/L Stainless Steel
 D = Insulated Doors 316 = 316/L Stainless Steel
 H = High Pressure
 Note: Can be combined
 example HI = High Pressure and Insulated

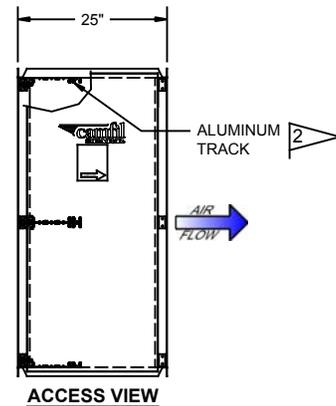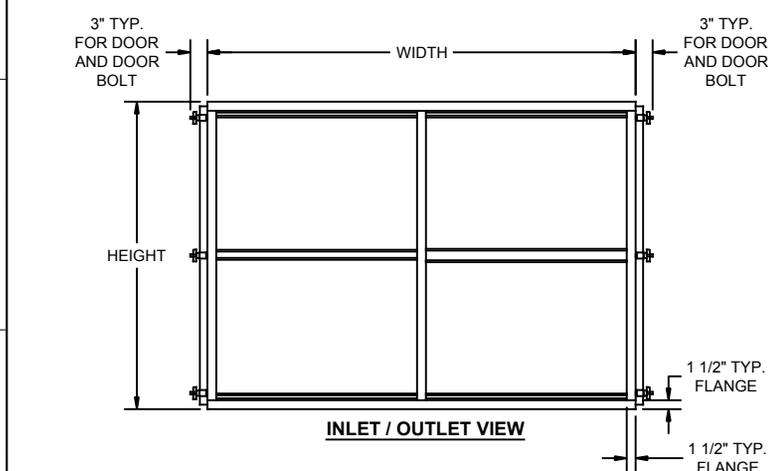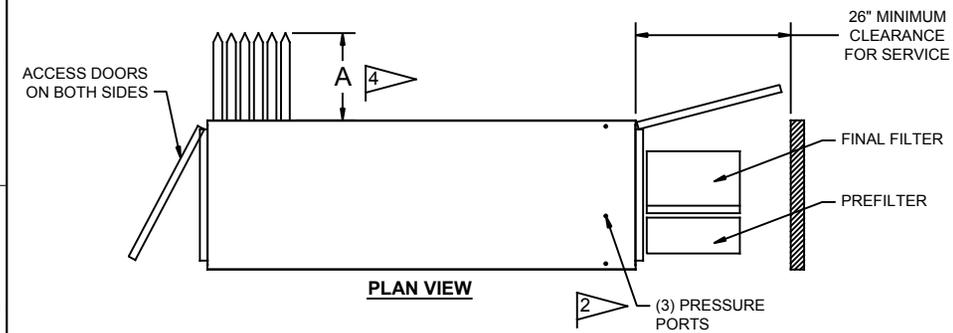

PERFORMANCE NOTES:

- STANDARD HOUSING OPERATING PRESSURE TO ±6" W.G. INTEGRITY OF HOUSING TO AMBIENT LEAKAGE IS LESS THAN 0.5% AT 3" W.G. LEAKAGE AROUND FILTER LESS THAN 1% OF RATED FLOW AT 3" W.G. DIFFERENTIAL.
- OPERATING TEMPERATURE 250° F CONTINUOUS. MEETS NFPA 90A AND TESTED PER ASTM-E84.
- INSULATION ON INSULATED UNITS IS 1" THICK AND IS RATED AT 0.25 - 0.30 "K" FACTOR.
- HIGH PRESSURE UNITS OPERATING PRESSURE TO ±8" W.G.

FILTER COMBINATIONS:

MULTIPLE FILTER COMBINATIONS CAN BE INCLUDED INSIDE THE HOUSING USING THE OPTIONS LISTED. TRACK DIVIDERS ARE PROVIDED ON EACH HOUSING TO ALLOW FOR ANY OF THE THREE OPTIONS LISTED.

	DEPTH	A
HI-FLO	15	0
	22	6.50
	30	14.50
	32	16.50
	36	20.50



- OPTION A:
(3) 2" FILTERS
(1) HEADER FILTER
- OPTION B:
(1) 2" FILTER
(1) 4" FILTER
(1) HEADER FILTER
- OPTION C:
(1) 6" FILTER
(1) HEADER FILTER

IF A HEADERED BAG FILTER IS USED, THE BAG WILL EXTEND OUTSIDE THE HOUSING PER THE FOLLOWING DIMENSION.

CUSTOMER APPROVAL BLOCK

YOUR APPROVAL OF THIS PRINT AUTHORIZES CAMFIL TO PROCEED WITH MATERIAL PROCUREMENT, TOOLING AND PRODUCT FABRICATION. ANY CHANGES MADE AFTER APPROVAL MAY INCUR FURTHER EXPENSES TO THE CUSTOMER

OK AS IS OK WITH REVISIONS SEND REVISED DWG.

SIGNATURE/DATE: _____ DATE: _____ DRAWN BY: _____ DATE: _____
 APPROVED BY: _____ DATE: _____ DRAWN BY: _____ DATE: _____



© Camfil <http://www.camfil.us>

DESCRIPTION
 CAMFIL GLIDEPACK MULTITRACK 25 HOUSING SALES DRAWING

SHEET	DRAWING NUMBER	REV.
1 of 1	M241 MT25	C