
## CleanSeal Exhaust V3 – Quick Instructions – download the full Manual here











|        | Filter<br>Size | А   | В   |
|--------|----------------|-----|-----|
| Square | 3P3            | 374 | 362 |
|        | 6P6            | 679 | 667 |
| Rect.  | 3P6            | 374 | 667 |
|        | 9P6            | 679 | 972 |


## h<50 mm Std. Compression h>50 ... 105 mm Other ranges: Contact Camfil M8 for custom options


#### Optional Quick Clamping kit – locking plates available for wall thicknesses h:



h<sub>2</sub>: 34-54 mm h<sub>3</sub>: 50-70 mm Other ranges: Contact Camfil custom options











### **Door Locking & Unlocking**


Simultaneously push door top corners to open / close

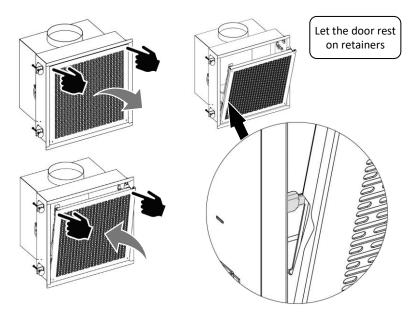

### Prefilter Exchange









Insert new filter and slide it to the bottom


### Door Removal / Insertion



Open door and remove pressure tube from door clips




Move the door to a position where door retainers are free from Stop-brackets




Gently slide door upwards to free hinges from slots


To insert the door, follow the steps in reverse order



### Main Filter Installation



Place filter on support rails



Adjust by turning the handle PU: Turn to bottom GEL: Adjust to filter height




To clamp the filter: Rotate the Clamp Close the handle


3



### **Clamp Settings**





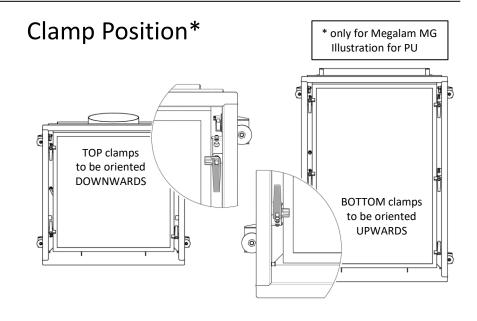


## CleanSeal Exhaust V3 – Quick Instructions – download the full Manual here











|        | Filter<br>Size | A   | В   |
|--------|----------------|-----|-----|
| Square | 3P3            | 374 | 362 |
|        | 6P6            | 679 | 667 |
| Rect.  | 3P6            | 374 | 667 |
|        | 9P6            | 679 | 972 |


## h<50 mm Std. Compression h>50 ... 105 mm Other ranges: Contact Camfil M8 for custom options

#### Optional Quick Clamping kit – locking plates available for wall thicknesses h:



h₁: 18-38 mm h<sub>2</sub>: 34-54 mm h<sub>3</sub>: 50-70 mm Other ranges: Contact Camfil custom options







Pre-position locking plates


Align mark with

nousing edge to insert,


# (3)

### **Door Locking & Unlocking**


Simultaneously push door top corners to open / close

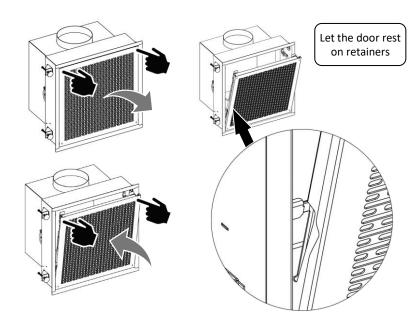

### Prefilter Exchange









Insert new filter and slide it to the bottom

### Door Removal / Insertion




Open door and remove pressure tube from door clips

Move the door to a position where door retainers are free from Stop-brackets




Gently slide door upwards to free hinges from slots


To insert the door, follow the steps in reverse order



### Main Filter Installation




Place filter on support rails



Adjust by turning the handle PU: Turn to bottom GEL: Adjust to filter height

bars and lock with screws



Insert preset clamping

To clamp the filter: Rotate the Clamp Close the handle

### **Clamp Settings**



