

CamSeal 2 – Installation Quick Instructions

Housing Installation


Recommended cutout dimensions





	Filter Size	Α	В
Square	3P3	362	362
	4P4	514	514
	5P5	565	565
	6P6	667	667
Rect.	3P6	362	664
	9P6	667	969
	11P5	565	1162
	12P6	667	1274

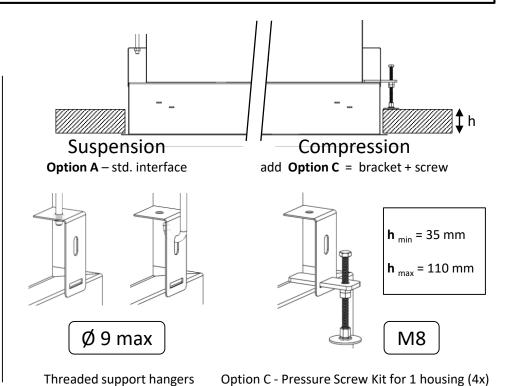

Filter Installation








not included


(2) Lock the clamping handle




to be ordered separetely: Ref. F8 000 000 5

Clamp Settings

Filter Height	Clamp Config.	
MD	Α	
78	В	




Damper Installation

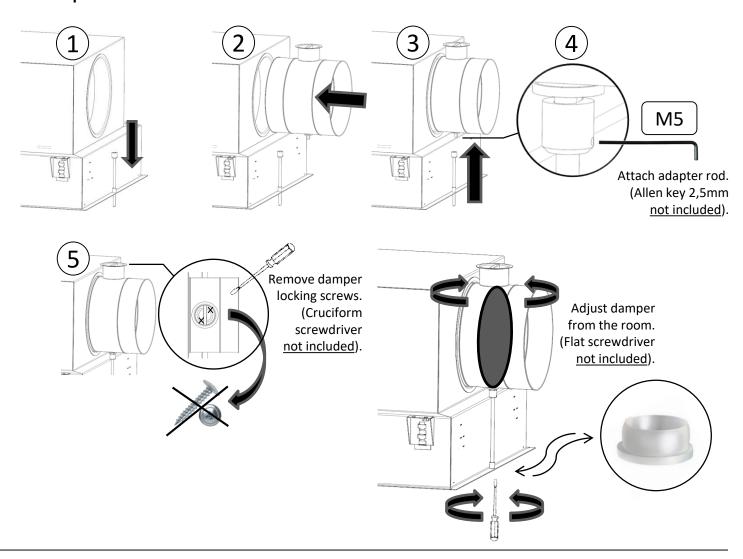



Use CleanSeal Quick Access Card (included) or any other plastic card

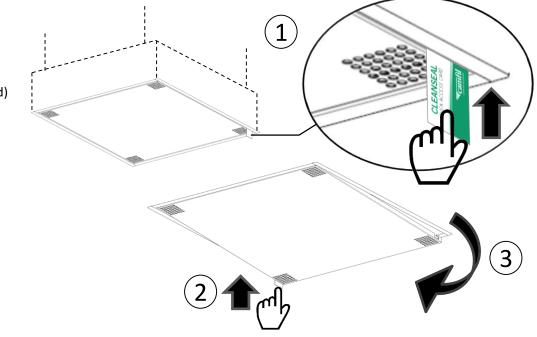

EMC_SPEC024_L2_E - CamSeal 2 Quick Instructions
Camfil AB - Sveavägen 56E - 11134 Stockholm - Sweden - +46 8 545 125 00 - www.camfil.com
V003 - 03.06.2020

