



To meet the industry's increasing demands for performance and power output, Camfil has developed the CamGT 4V-300 gas turbine filter with a solid, airtight frame and our proven technique for fixing the media, the double-sealing design.

The result is a high-performing filter that eliminates bypass air, extends turbine life, and reduces maintenance costs. Furthermore, each filter grade is individually optimized in order to provide the lowest possible pressure drop.

A solid EPA construction


The CamGT series includes top of the line high performance features:

- the original vertical pleat with open hotmelt for improved drainage and low and stable operating pressure drop
- the patented drainage vane design improves drainage even further
- the patented double sealed construction and hydrophobic media eliminates the risk of dissolved contaminants or salt by-pass, thereby eliminating corrosion risks and reducing fouling
- the patented aerodynamic grid featuring an optimized air exiting vane reduces pressure drop even further and ensures strength and rigidity over 6250 Pa even when wet.


With the uninterrupted molded polyurethane gasket permanently fixed to the filter frame, the filter installation is simplified and the risk for filter leakage is limited. The new and improved filter geometry reduces the construction pressure drop even further.

High humidity conditions

The vertical pleats and open separators allow trapped water to drain freely from the filter during operation, thus avoiding re-entrainment of dissolved impurities and maintaining low pressure drop under high humidity conditions. The new frame has a unique draining system where water is immediately separated from the media and drained out through special drainage channels. These channels are without contact with the media and thus minimizing the risk of getting water to slowly migrate through the media.



Camfil's unique open hot melt separator design



Industry standard closed hot melt separators

Reduced shutdowns

This level of protection prevents pressure spikes and unplanned downtime from offline water washes. It also prevents hot corrosion that increases heat rate and robs your engines of power. And with a longer filter life, you can plan your filter changes to match up with regular maintenance intervals.


The Cam GT range includes the high performing T10, T11, and T12 versions. They all offer considerable improvements in engine protection, resulting in lower engine degradation and prolonged service intervals without need of shutdowns for compressor cleaning.

Each filter grade is individually optimized for lowest pressure drop and maximum life.

Key features:

- Ensures water drainage
- High filtration efficiency
- Low pressure drop also in wet conditions
- Resistant to turbulence and extreme pressure drop
- Easy mounting
- Meets the industry's latest and most stringent standards
- Water resistant media

Pressure drop

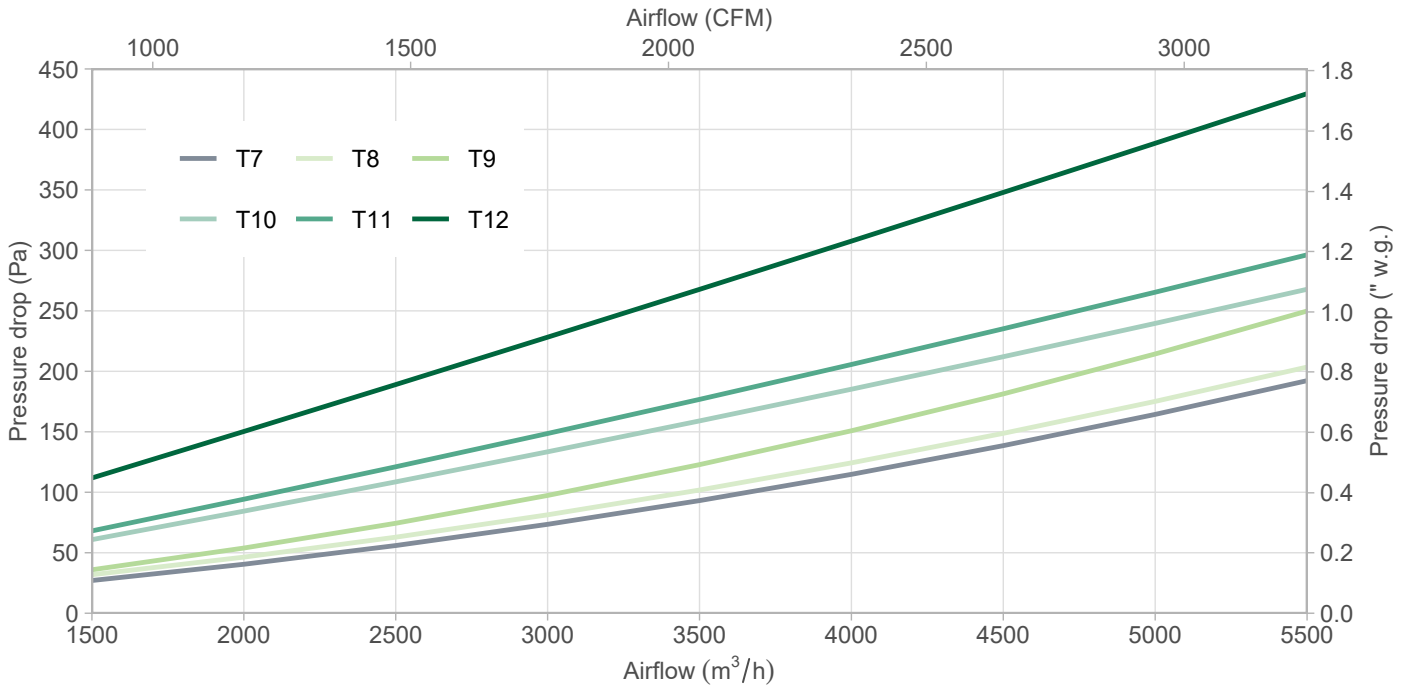

Technical data

Model	WxHxD		Shipping data		Air flow/Press. loss		Filter class
	mm	inch	m ³ / ft ³	kg / lb	m ³ / h / Pa	CFM / \"wg	ISO 29461-1:2021
CamGT 4V-300 T7	592x592x300	23.3x23.3x11.8	0.13/4.4	8.0/17.6	4250/130	2500/0.52	T7
CamGT 4V-300 T8	592x592x300	23.3x23.3x11.8	0.13/4.4	8.0/17.6	4250/140	2500/0.56	T8
CamGT 4V-300 T9	592x592x300	23.3x23.3x11.8	0.13/4.4	8.0/17.6	4250/165	2500/0.66	T9
CamGT 4V-300 T10	592x592x300	23.3x23.3x11.8	0.13/4.4	8.5/18.7	4250/200	2500/0.80	T10
CamGT 4V-300 T11	592x592x300	23.3x23.3x11.8	0.13/4.4	8.5/18.7	4250/225	2500/0.90	T11
CamGT 4V-300 T12	592x592x300	23.3x23.3x11.8	0.13/4.4	9.0/19.8	3400/260	2000/1.04	T12

Type	Compact pleated filter	Header	Available in 20mm and 25mm
Frame	Injection moulded plastic	Rec. temperature	70°C/158°F max. operating temp.
Media	Pleated water resistant glass fiber	Burst strength	>6 250 Pa continuous wet/soaked
Separators	Hot melt	Nominal airflow	4 250 m ³ / h
Gasket	Continuous PU foam	Maximum airflow	1.3 x nominal airflow
Seal	Polyurethane double sealing system	Efficiency standards	ISO 29461-1:2021

Model variations available	<ul style="list-style-type: none"> CamBrane (composite membrane media) Reverse flow Additional media grades upon request 	<ul style="list-style-type: none"> Half-size XL (extra media area 26sqm)
-----------------------------------	---	--

Camfil Power Systems