



## Advantages

- Low pressure drop
- Individually VOC outgassing tested
- High media cleanliness
- Multiple media types can be combined into the same filter

**Application:** Clean room recirculation air, clean room make up air

**Type:** Box Filter & Header Filter

**Frame:** Galvanised steel


**Sealant:** Polyurethane

**Temperature max:** 10 - 40°C

**RH. max:** 30% - 70%

**Particle cleanliness:** ISO Class 6

**Outgassing:** Individually outgassing tested for VOC emissions

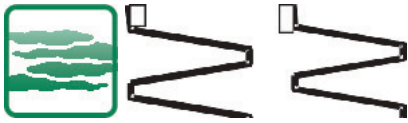

Type	Target contaminant	Dimensions WxHxD (mm)	Air Flow/pressure drop (m³/h/Pa)	Weight (kg)
NXDPB2	Bases	592x592x292	3300/50	15
NXDPB2	Bases	287x592x292	1600/50	10
NXDPC3	Acids	592x592x292	3300/50	15
NXDPC3	Acids	287x592x292	1600/50	10
NXDPL3	Organics	592x592x292	3300/50	15
NXDPL3	Organics	287x592x292	1600/50	10
NXDPB2C3L3	Bases, Acids, Organics	592x592x292	3300/140	20
NXDPB2C3L3	Bases, Acids, Organics	287x592x292	1600/140	12