



Advantages

- Low pressure drop
- Low weight
- High media cleanliness
- Incinerable

Application: Clean room recirculation air, clean room make up air

Type: Compact Pleated Filter

Frame: ABS

Sealant: Polyurethane


Temperature max: 40°C

RH. max: 70%

Particle cleanliness: ISO Class 6

Gasket: 01 = downstream, 10 = upstream

Outgassing: Individually outgassing tested for VOC emissions on request

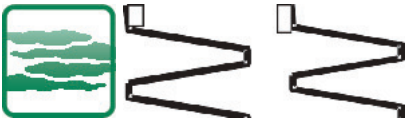

Dimensions WxHxD (mm)	Air Flow/pressure drop (m ³ /h/Pa)	Weight (kg)
592x592x292	3300/50	12
592x287x292	1600/50	6,5
592x592x292	3300/60	12
592x287x292	1600/60	6,5
592x592x292	3300/60	12
592x287x292	1600/60	6,5
592x592x292	3300/60	12
592x287x292	1600/60	6,5