



## Advantages

- Low pressure drop
- Low weight
- High media cleanliness
- Incinerable

**Application:** Clean room recirculation air, clean room make up air

**Type:** Compact Pleated Filter

**Frame:** ABS

**Sealant:** Polyurethane

**Temperature max:** 40°C


**RH. max:** 70%

**Particle cleanliness:** ISO Class 6

**Outgassing:** Individually outgassing tested for VOC emissions on request.

**Gasket:** 01 = downstream, 10 = upstream

**Outgassing:** Individually outgassing tested for VOC emissions on request

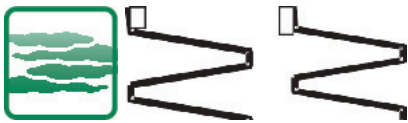

Type	Target contaminant	Dimensions WxHxD (mm)	Air Flow/pressure drop (m³/h/Pa)	Weight (kg)
NXPB2	Bases	592x592x292	3300/50	12
NXPB2	Bases	592x287x292	1600/50	6,5
NXPB3	Acids	592x592x292	3300/60	12
NXPB3	Acids	592x287x292	1600/60	6,5
NXPB4	Organics	592x592x292	3300/60	12
NXPB4	Organics	592x287x292	1600/60	6,5
NXPB3	Bases	592x592x292	3300/60	12
NXPB3	Bases	592x287x292	1600/60	6,5