

Slimline DCM

Low Profile Ducted HEPA Filter Module Available with Fixed or Adjustable Air Diffuser



Adjustable diffuser model shown. Fixed diffuser models do not have a centerboard.

Low-profile HEPA filter module for critical air applications. Pressure Drop at Face Velocity Initial Resistance vs Airflow String 0.5 0.5 0.5 0.5 0.5 0.4 100 0.25 50 75 100 125 Airflow (fpm)

The Camfil Slimline DCM Ducted Ceiling Module is ideal for applications where minimal installation space is available and ultra clean air is a requirement. The Camfil Slimline DCM offers:

- High efficiency leak free particulate control.
 Available efficiencies include 95%, 99.99% @

 0.3 microns, and 99.9995% @ most penetrating particle size (MPPS).
- A low profile allowing installation in a minimal depth conserving space for manufacturing or other room components. Constructed of light weight extruded aluminum profiles and joined at the corners with Camfil's Klip-Lok mechanism. The Slimline installs in any standard 1½ " or 2" T-bar grid system. Seismic tabs are included.
- A 41-mm filter pack, completely encapsulated in a polyurethane sealant. The sealant is chemically stable to ensure minimal out-gassing and maintains excellent mechanical properties ensuring high-purity air for the most demanding environments over the life of the filter.
- A media configuration that is optimized through Controlled Media Spacing (CMS) resulting in a lower pressure drop than other media pleating techniques. Hot melt media separators promote uniform airflow while eliminating media to media contact and fiber break-off associated with other media pleating techniques.
- On all models an integrated diffusion disc promotes uniform airflow over the entire filter. On models with adjustable diffusion discs, the disc allows filterto-filter air balancing.
- Either a 10" or 12" collar connection. The collar includes an integral continuous raised ridge to assist in securing flexible ducting.
- An integral white epoxy powder-coated steel grille with 62% open area to promote proper airflow and protect the filter element.



Slimline DCM

Low Profile Ducted HEPA Filter Module Available with Fixed or Adjustable Air Diffuser

Performance

Model	Width (inches)	Length (inches)	Height (inches)	Resistance @ 100 fpm (inches, w.g.)	Shipping Weight (lbs)
Fixed Damper Model with HEPA, 99.99%	@ 0.3 micron				
D5-23.62-23.62-2-02-00-1D-00-*	23.62	23.62	4.73	0.47	21
D5-23.62-47.62-2-02-00-1D-00-*	23.62	47.62			34
Fixed Damper Model with ULPA, 99.9995	% @ MPPS ¹				
D7-23.62-23.62-2-02-00-1D-00-*	23.62	23.62	4.73	0.67	21
D7-23.62-47.62-2-02-00-1D-00-*	23.62	47.62			34
Adjustable Damper Model with HEPA, 99.	99% @ 0.3 micron				
D5-23.62-23.62-2-02-00-1D-C2-*	23.62	23.62	4.73	0.47	24
D5-23.62-47.62-2-02-00-1D-C2-*	23.62	47.62			37
Adjustable Damper Model with ULPA, 99.	9995% @ MPPS ¹				
D7-23.62-23.62-2-02-00-1D-C2-*	23.62	23.62	4.73	0.67	24
D7-23.62-47.62-2-02-00-1D-C2-*	23.62	47.62			37
			•		


DATA NOTES:

For fixed damper model – 00-* should be replaced with: 00-Y (for 12" collar fixed), 0018 (for 10" collar fixed).


For adjustable damper model – C2-* should be replaced with: C2-P (for 10" collar adjustable), C2-Q (for 12" collar adjustable)


'H' or height dimension includes overall height of module. Add 2" for collar. $^1\,\rm MPPS$ —Most Penetrating Particle Size

Fixed Air Diffusion Disc Model

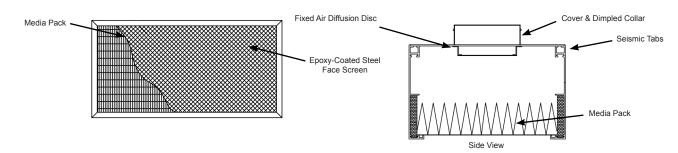

Adjustable Air Diffusion Disc Model







For detailed specifications please consult your local Camfil Distributor, Representative or Terminal Housings for all styles. Camfil has a policy of uninterrupted research, development and product improvement, We reserve the right to change designs and specifications without notice.



Camfil | 1 North Corporate Drive, Riverdale, NJ 07457 | Tel: (973) 616-7300